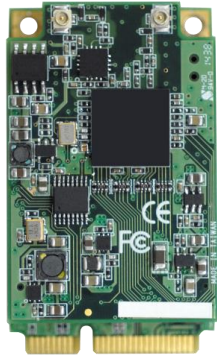
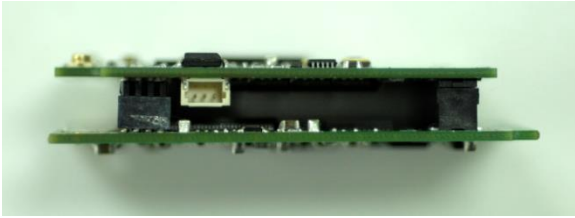
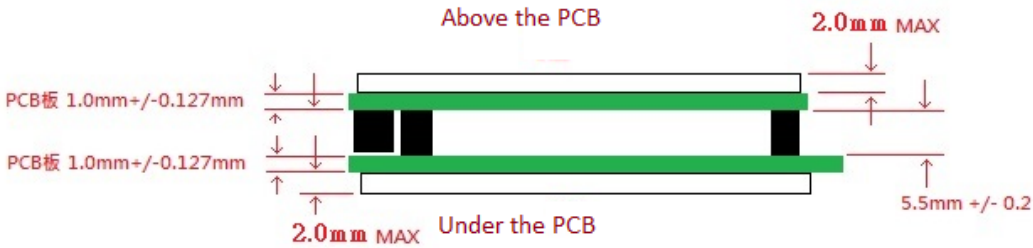


Model	VDB-5C0N1 MC SDI
Max. FPS	1920×1080p@60/50fps in → 1920×1080p@60/50fps out
Recording Mode	Hardware Compression, Real-Time Mode
Product photo	
Dimension	30×50.95 (mm)
Interface	Minicard (PCIe×1)
Video Input	1×SDI
Video Output	1×SDI (Loop-Through)
Display Video Format	YV12, NV12, YUY2, RGB24, RGB32
Video RAW Data Resolution	3G-SDI 1920×1080p @60/50fps HD-SDI 1920×1080p @30/25/24fps 1920×1080i @60/50fps 1280×720p @60/50fps SD-SDI 720×480i @60fps 720×576i @50fps
Recording Video Format	H.264 (Hardware Compression)
Recording Video Resolution	3G-SDI 1920×1080p @60/50fps HD-SDI 1920×1080p @30/25/24fps 1920×1080i @60/50fps

	<p>1280x720p@60/50fps</p> <p>SD-SDI</p> <p>720x480i@60fps</p> <p>720x576i@50fps</p>
Audio Input	<p>1xSDI Embedded Audio</p> <p>Audio L/R (Through Wafer Connector)</p>
Audio Format	<p>Stereo / 16-bit / 32000 ~ 48000Hz</p>
Multiple Cards	<p>∞</p>
SDK	<p>Support API : DirectShow, V4L2, FFmpeg, Gstreamer</p> <p>Support Language : C++, C#, .NET, Visual Basic, Qt, Delphi</p>

System Requirement	
OS Support	Windows XP / Vista / Windows 7 Windows 8 / Windows 8.1/ Windows 10 Linux 2.6.14 or Higher (32-bit and 64-bit)

System Requirement	
Device Thickness Photo	

Device Thickness Measurement	 <p>Above the PCB: 2.0mm MAX</p> <p>PCB板 1.0mm +/- 0.127mm</p> <p>PCB板 1.0mm +/- 0.127mm</p> <p>Under the PCB: 2.0mm MAX</p> <p>5.5mm +/- 0.2</p>
------------------------------	---

Connection Diagram

