



EBOX-7000

Taiwan Patent No. M447854, M592609

Intel 9th Gen Core i7/ Intel 8th Gen Core i7/i5/i3 CPU w/ 6 x RJ45 GbE (optional 4 x PoE Max. 100W)/ 4 x COM / 1 x DP/ 1 x HDMI/ 1 x DVI-I/ 4 x USB 3.0/ 9-48V Edge Computing

Features

- Intel 9th Gen Core i7/ Intel 8th Gen Core i7/i5/i3
- 1 x PCIe 3.0 x16 Interface Expansion (optional 2 x PCIe 3.0 x8 Interface)
- 6 x RJ45 GbE (optional 4 x PoE Max. 100W)
- 8 x GPI, 4 x GPO and 2 x RS-232/422/485
- 1 x DP + 1 x HDMI + 1 x DVI-I (Single Link w/o Analog Video)
- Dual Hot Swappable SATA Storage RAID 0,1,5
- 9-48V DC Input and Operating Temp.: -40~70°C
- TPM 2.0




Introduction

The EBOX-7000 Edge Computing is suitable for various factory automation and Industrial Internet of Things (IIoT) control system in large-scale processes such as mining and manufacturing. It is powered by Intel 9th Gen Core i7/ Intel 8th Gen Core i7/i5/i3 CPU with 6 x RJ45 GbE (optional 4 x PoE Max. 100W).

EBOX-7000 features TPM 2.0 and memory 2 x DDR4 2400/2666 MHz SO-DIMM up to 32GB. Furthermore, the environmental tolerance continually maintains a wide range of operating temperatures (-40°C ~ 70°C). In addition, it provides Intel® UHD Graphics 630 with max resolution (HDMI): 4096x2304@24Hz.

Dimensions

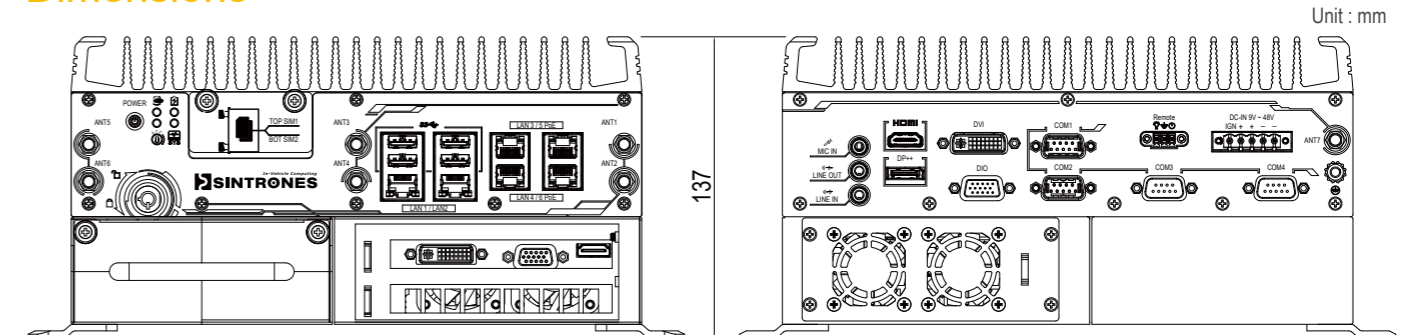

Please Scan The QR Code For More Information

Specifications

| System | |
|----------------------|---|
| CPU | Intel Gen9 Core i7-9700TE (12M Cache 1.8GHz up to 3.8GHz) Intel Gen8 Core i7-8700T (12M Cache 2.4GHz up to 4.0GHz) Intel Gen8 Core i5-8500T (9M Cache 2.1GHz up to 3.5GHz) Intel Gen8 Core i3-8100T (6M Cache 3.1GHz) Intel Gen8 Celeron G4900T (2M Cache 2.9GHz) |
| Memory | 2 x DDR4 2400/2666 MHz SO-DIMM up to 32GB |
| LAN Chipset | 5 x Intel i210-AT and 1 x i219 (iAMT9.5 w/ i5, i7 only) Gb/s Ethernet Controllers Onboard Support PXE and WOL |
| Watchdog | 1 ~ 255 Level Reset |
| TPM | 2.0 |
| I/O | |
| Serial Port | 4 x RS 232/422/485 (Auto Direction Control) |
| USB Port | 4 x USB 3.0 Ports |
| LAN | 6 x RJ45 GbE (optional 4 x PoE Max. 100W) |
| Video Port | 1 x DP + 1 x HDMI + 1 x DVI-I (Single Link w/o Analog Video) |
| DIO Port | 8 x GPI (5~48VDC) and 4 x GPO (5VDC, 100mA) |
| Audio | 1 x Line-out, 1 x Line-in and 1 x Mic-in |
| Expansion Bus | Riser card w/ 1 x PCIe x16 slot (1 x PCIe 3.0 x16 interface w/ 1 x ATX 6 Pin Power supports up to 185mm length and total 90W~150W PCIe cards) Optional riser card w/ 2 x PCIe x16 slot (2 x PCIe 3.0 x8 interface w/ 1 x ATX 6 Pin Power supports up to 185mm length total 90W~150W PCIe cards) *Maximum 90W power supply for PCIe cards when DC 9V system power input is in used. Maximum 150W power supply for PCIe cards requires DC power input to be above 15V. 2 x Full Mini-PCIe Slots and 1x M.2 A-E Key 2230 slot (PCIe & USB2.0 Interface for WiFi/BT) 1x M.2 B Key 2242 slot (USB3.0 Interface only for 3G/4G LTE w/ 2 x SIM sockets) Patent No. : M592609 - Automatic SIM Card Detection |

| Graphics | |
|--------------------------|--|
| Graphics | Intel® UHD Graphics 630 |
| Resolution | Max Resolution (HDMI) : 4096x2304@24Hz |
| Software | |
| Operating System | Win 10, Ubuntu 18.04 64bit |
| Environmental | |
| Operating Temp. | -40°C ~ 70°C, with SSD and ambient w/ air flow 0.6m/s (System only, not including PCIe cards) -20°C ~ 60°C with BAT-5200 Battery Kit |
| Storage Temp. | -40°C ~ 80°C |
| Relative Humidity | 10% RH ~ 90% RH (non-condensing) |
| Certifications | CE, FCC Class A, RoHS (Self declaration) |
| Storage | |
| Type | 2 x 2.5" Drive Bay for SATA Type HDD/SSD RAID 0, 1, 5 1 x M.2 M key 2242 and 2280 (SATA) |
| Power Requirement | |
| Power Input | 9V - 48V DC Power Input |
| Power Protection | Automatics Recovery Short Circuit Protection |
| Power Mgmt. | Vehicle Power Ignition for Variety Vehicle |
| Power Off Control | Power off Delay Time Setting by BIOS and Software |
| Battery (UPS) | Internal Battery Kit for 10 Mins Operating (Optional and cannot be installed with PoE module) UPS operating time varies depending on PCIe cards w/ different power consumption Patent No. : M447854 - Build-in Battery |
| Mechanical | |
| Construction | Aluminum Alloy |
| Mounting | Wall-mount |
| Dimensions | 260(L) x 250(W) x 137(H) mm |

Ordering Information

| | |
|------------------------|---|
| Part Number | EBOX-7000PE1-i7R Optional for i7/i5/i3/C1 (with PoE) - EBOX-7000E1-i7R Optional for i7/i5/i3/C1 EBOX-7000PE2-i7R Optional for i7/i5/i3/C1 (with PoE) - EBOX-7000E2-i7R Optional for i5/i3/C1 |
| Description | Intel 9th Gen Core i7/ Intel 8th Gen Core i7/i5/i3 CPU w/ 6 x RJ45 GbE (optional 4 x PoE Max. 100W) / 4 x COM / 1 x DP/ 1 x HDMI/ 1 x DVI-I/ 4 x USB 3.0/ 9-48V Edge Computing |
| State of Origin | Made in Taiwan |

Optional Accessories

| | | | |
|-----------------|---|---------------------------|--|
| DRAM | SO-DIMM max.DDR4-2666,4GB~32GB,0~70°C/-40~85°C | GPS | GPS miniPCIe card |
| SATA SSD | 2.5inch TLC 64GB~1TB -40~85°C | CANBUS | CANBUS miniPCIe card |
| mSATA | M.2 M key TLC -40~85°C, 2280 64GB~1TB / 2242 64GB~512GB | Battery backup kit | BAT-5200 kit, 5200mAh, -30~60°C, discharge -20~60°C, operating about 10 mins. Cannot be used w/PoE Module. |
| Wifi | M.2 802.3a/b/g/n/ac | External cable | 280W/24V power adapter |
| Modern | LTE M.2 B Key 2242 x 1, LTE miniPCIe card x 1 | Power adapter | N/A |